


## 21\*\*4A

### 21\*\*3A

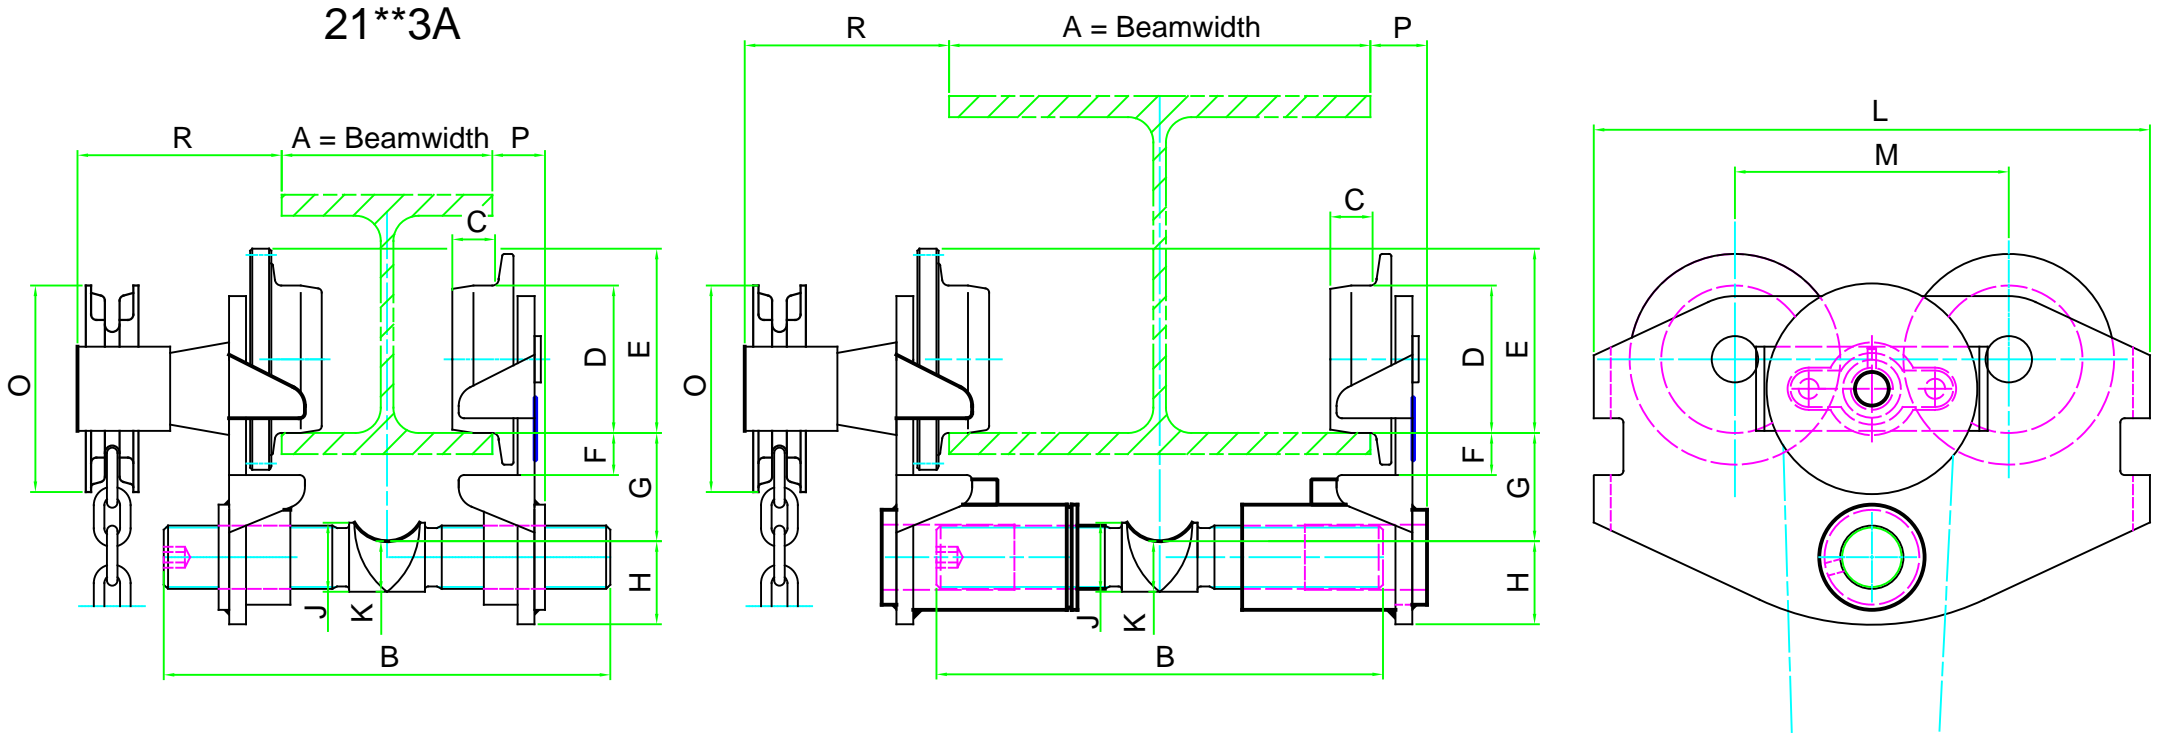

WLL kg	Model	A min-max	B	C	øD	E	F	G	H	øJ	øK	L	M	øO	P	R	Min curve radius m	Weight kg
500	<b>21123A</b>	50-160	212	20	70	88	20	45	33	25	19	216	100	98	26	97	1.25	14.3
500	<b>21124A</b>	161-280	212	20	70	88	20	45	33	25	19	216	100	98	26	97	1.25	15.5
1000	<b>21143A</b>	50-160	212	20	70	88	20	51	40	32	24	264	130	98	26	97	1.25	14.3
1000	<b>21144A</b>	161-280	212	20	70	88	20	51	40	32	24	264	130	98	26	97	1.25	15.5
2000	<b>21163A</b>	64-180	248	24	100	120	25	63	51	40	32	345	165	98	30	106	1.8	26
2000	<b>21164A</b>	181-300	248	24	100	120	25	63	51	40	32	345	165	98	30	106	1.8	28
3000	<b>21173A</b>	74-180	262	28	114	137	31	78	57	46	35	384	180	151	35	111	2.2	38
3000	<b>21174A</b>	181-300	262	28	114	137	31	78	57	46	35	384	180	151	35	111	2.2	41
5000	<b>21193A</b>	82-180	270	34	140	166	34	92	64	56	42	455	215	178	40	118	2.5	63
5000	<b>21194A</b>	181-300	270	34	140	166	34	92	64	56	42	455	215	178	40	118	2.5	67